



Features


- 3MP HD IR Speed Dome Camera
- 1/2.8" Progressive CMOS sensor, 25 / 30fps
- Optical Zoom: 20x
- Day / Night mode
- ~100m IR illumination range
- H.265 / Enhanced H.264 compression
- IP66 weather proof
- 128 Presets, 4 Patrols, 4 Patterns

Specifications

MODEL		MQ 6121 - HD
VIDEO	IMAGE SENSOR	1/2.8" Progressive CMOS sensor
	RESOLUTION	2048 x 1536 (3MP)
	FRAME RATE	Up to 30 fps
	MINIMUM ILLUMINATION	0.0 Lux, IR ON, ~100m
	LENS	20x Optical Zoom, f=5.5mm – 110mm, F1.6 ~ F3.5
AUDIO	INPUT	1 ch
	OUTPUT	1 ch
CONNECTIVITY	NETWORK INTERFACE	RJ-45, 10/100 base-T Ethernet
	NETWORK PROTOCOL	TCP/IP, UDP, DHCP, DDNS, NTP, RTSP, SMTP
	DYNAMIC IP	DDNS
	VIDEO MAIN STREAM RESOLUTION	2048 x 1536, 1920 x 1080, 1280 x 720, 640 x 480, 320 x 240
	WEB SERVER	Built-in
EVENT HANDLING	EXTERNAL ALARM	1 x Input, 1 x Output
COMPRESSION	VIDEO COMPRESSION	H.265 / Enhanced H.264
	VIDEO STREAMING	3 Independent Streams
POWER	POWER IN	DC 24V/ 2500mA
	MAX. RATING	15W / 30W (IR ON)
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	-20°C - 60°C
	RELATIVE HUMIDITY	<95% (No Condensation)
MECHANICAL DESIGN	WEATHER PROOF	IP66
	PROTECTION LEVEL	TVS 4KV Lightning Protection, Surge Protection
	NET WEIGHT	4kg

Dimensions

Unit: mm

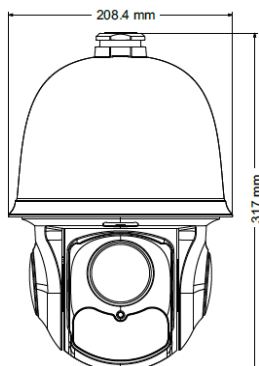

www.TeleEye.com

TeleEye Group

Hong Kong China Malaysia Philippines
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY:

Design and specifications are subject to change without prior notice. Copyright © 2016 Signal Communications Limited. TeleEye is a trademark of Signal Communications Limited and is registered in China, European Community, Hong Kong, U.S. and other countries. All other trademarks are the property of their respective owners.

Printed: 2016.08