





### Features

- Max. resolution: 1920 x 1080
- 1/2.8" Sony 2MP Starlight CMOS sensor
- Enhanced H.264 compression
- 3 independent video streams
- Vari-focal f=2.8mm ~ 12mm
- 20~30m IR illumination range
- IP66 weather proof
- Power over Ethernet
- ONVIF Profile S

### Specifications

MODEL		MP2365E-HD
VIDEO	IMAGE SENSOR	1/2.8" Sony 2MP Starlight CMOS
	RESOLUTION	1080P ( 1920 × 1080 ), 720P ( 1280 × 720 ), D1, CIF, 480 x 240
	FRAME RATE	Up to 25/30fps
	MINIMUM ILLUMINATION	0Lux (IR ON); Color: 0.005Lux / F1.2, AGC ON; B/W: 0.001Lux / F1.2, AGC ON
	IR DISTANCE	20-30m
	LENS	f=2.8mm ~12mm vari-focal lens
	VIEW ANGLE	95.7° ~ 35.9°
	ELECTRONIC SHUTTER	1 / 25 s ~ 1 / 100000 s
	VIDEO SETTINGS	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc.
CONNECTIVITY	NETWORK INTERFACE	RJ-45
	NETWORK PROTOCOL	TCP / IP, UDP, DHCP, N Network Protocol TP, RTSP, DDNS, SMTP, FTP
	CONCURRENT USERS	3
	WEB SERVER	Built-in
	ONVIF	Profile S
COMPRESSION	VIDEO COMPRESSION	Enhanced H.264
	VIDEO STREAMING	3 Independent Streams
EVENT HANDLING	MOTION DETECTION	Yes
	ACTION	Email
POWER	VOLTAGE	12VDC
	MAX. RATING	6W
	POE	YES
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	-20°C ~ 50°C
	RELATIVE HUMIDITY	10%-90%
MECHANICAL DESIGN	WEATHER PROOF	IP66
	DIMENSION	Φ 87mm x 220mm
	WEIGHT	600g

### Dimension

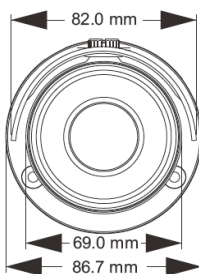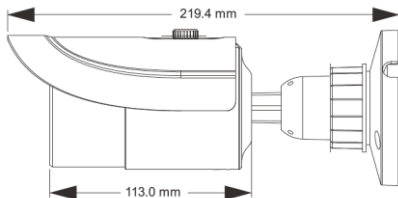

**TeleEye Group**  
Hong Kong China Malaysia Philippines  
South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY:

[www.TeleEye.com](http://www.TeleEye.com)