





Features

- 1/3" 4MP CMOS sensor, 25/30fps
- H.265 / Enhanced H.264 compression
- 3 independent video streams
- 10m IR illumination range
- f=2.8mm fixed lens
- TF card storage, up to 128GB
- One built-in microphone
- IP66 & IK10 ingress protection
- Power over Ethernet
- ONVIF Profile S

Dimension

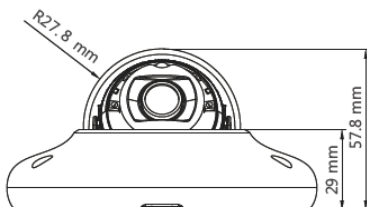

Specifications

MODEL		MP411AE-HD
VIDEO	IMAGE SENSOR	1/3" 4MP CMOS Sensor
	RESOLUTION	2560 x 1440 / 2304 x 1296 / 1920 x 1080 (1080p) / 1280 x 720 (720p) / D1 / CIF / 480 x 240
	FRAME RATE	Up to 25/30fps
	MINIMUM ILLUMINATION	0.05 lux @F1.2, AGC ON; 0 lux with IR
	IR Distance	0~10m
	LENS	f=2.8mm Fixed Lens
	VIEW ANGLE	100°
	ELECTRONIC SHUTTER	1 / 25 s ~ 1 / 100000 s
	VIDEO SETTINGS	ROI, Saturation, Brightness, Chroma, Contrast, Wide Dynamic, Sharpen, NR, etc.
	ANALOG VIDEO OUTPUT	CVBS video output (BNC × 1)
AUDIO	INPUT	LINE IN × 1 or one built-in microphone
CONNECTIVITY	NETWORK INTERFACE	RJ45
	NETWORK PROTOCOL	TCP / IP, UDP, DHCP, NTP, RTSP, PPPoE, DDNS, SMTP, FTP
	CONCURRENT USERS	10
	WEB SERVER	Built-in
	ONVIF	Profile S
COMPRESSION	VIDEO COMPRESSION	H.265 / Enhanced H.264
	VIDEO STREAMING	3 Independent Streams
EVENT HANDLING	MOTION DETECTION	Yes
	ACTION	Snap, Recording, Alarm output, Email
EDGE RECORDING	TF Card	Max. 128GB
POWER	VOLTAGE	12VDC
	MAX. RATING	3.5W / 4.5W (IR On)
	POE	YES
OPERATING ENVIRONMENT	AMBIENT TEMPERATURE	-20°C ~ 50°C
	RELATIVE HUMIDITY	10%-90%
MECHANICAL DESIGN	WEATHER PROOF	IP66
	VANDAL RESISTANT	IK10
	DIMENSION	Φ110mm × 58mm
	WEIGHT	360g

TeleEye Group
 Hong Kong China Malaysia Philippines
 South Africa Sri Lanka Turkey U.K.

DISTRIBUTED BY:

www.TeleEye.com